

HAAS Super Mini Mill Bearbeitungszentrum

INHALTSVERZEICHNIS

1. Technische Daten 3
2. Fotos der Maschine 4

1. TECHNISCHE DATEN¹


Anzahl Achsen:		3
X-Achse:		406 mm
Y-Achse:		305 mm
Z-Achse:		254 mm
Spindeldrehzahl:		10`000 U/Min
Spindelnaese:		SK40
Werkzeugwechsler, Anzahl:		10
Tischgrösse:		900 x 310 mm
Abmessungen und Gewicht:	Abmessungen:	1880 x 2007 x 2692 mm
	Gewicht:	1600 kg

^{1 1} Für die Richtigkeit, Vollständigkeit und Aktualität der Angaben übernehmen wir keine Gewähr

2. FOTOS DER MASCHINE





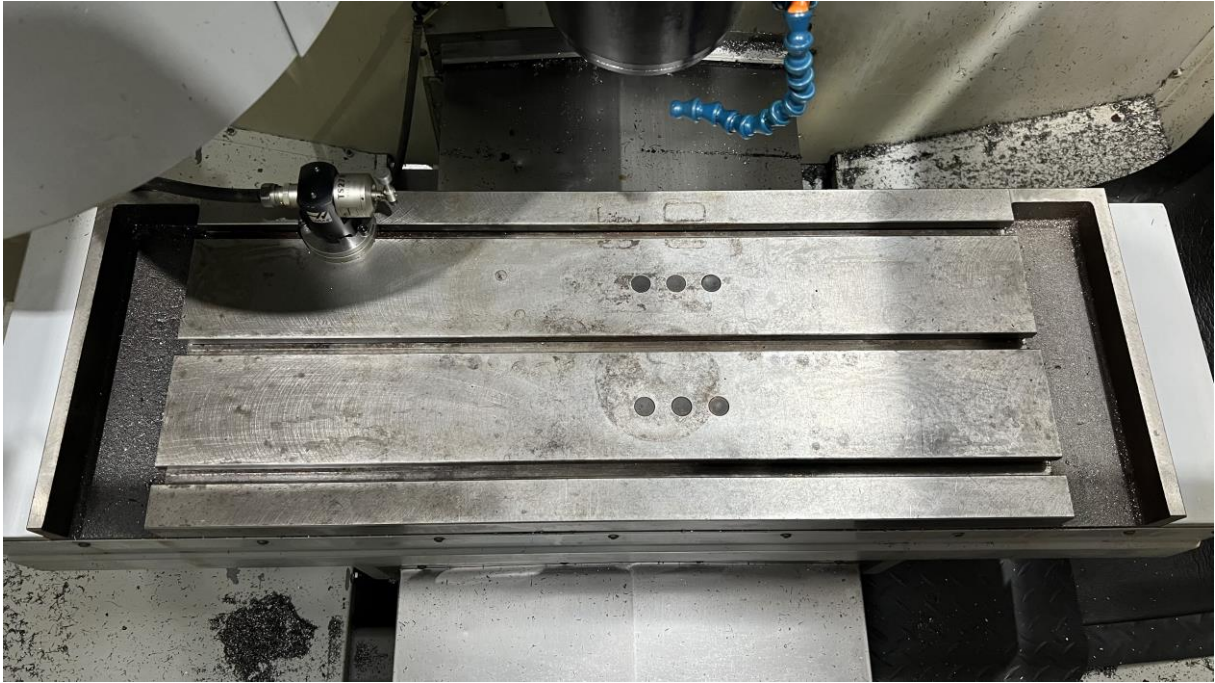

















HAAS **MODEL**
SMTHMILL

HAAS AUTOMATION, INC, OXNARD, CA. 93030

SERIAL NUMBER 44711

DATE OF MFG 11/05

VOLTAGE 360-480

PHASE 3

HERTZ 50/60

FULL LOAD 20 AMPS

LARGEST LOAD 35 AMPS

SHORT CIRCUIT
INTERRUPTING CAPACITY - 10,000 AMPS

WIRING DIAGRAM.... 96 8100

OVER CURRENT PROTECTION PROVIDE
AT MACHINE SUPPLY TERMINALS.

WARNING

LETHAL VOLTAGES INSIDE CABINET!
DICONNECT FROM POWER SOURCE
BEFORE OPENING CABINET!
TRAINED SERVICE PERSONNEL ONLY!

MADE IN U.S.A.
P/N 29-7900A REV. G



15

ETL LISTED
CONFORMS TO
NFPA STD 79
CERTIFIED TO
CAN/CSA STD C22.2 NO. 73

9700845